

KLX250


KLX250

± 3,625 *



Model Year 2009

FEATURES

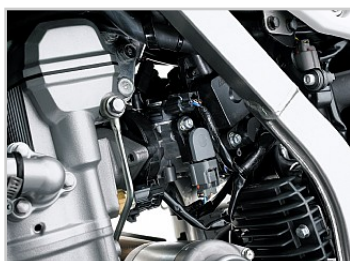

Fuel injection



Exhaust system



Frame and swingarm



Ergonomics

SPECIFICATIONS

Engine type	Liquid-cooled, 4-stroke Single
Displacement	249 cm ³
Bore x stroke	72.0 x 61.2 mm
Compression ratio	11.0:1
Valve/Induction system	DOHC, 4 valves
Maximum power	16 kW {22 PS} / 7,500 rpm
Maximum torque	20.5 N-m {2.1 kgf-m} / 7,000 rpm
Fuel system	Fuel injection: ϕ 34 mm x 1 (Keihin)
Ignition	Digital CDI
Starting	Electric
Lubrication	Forced lubrication, wet sump
Transmission	6-speed, return
Final Drive	Chain
Clutch	Wet multi-disc, manual
Frame type	Perimeter, high-tensile steel
Rake/Trail	26.5° / 105 mm
Suspension, front	43 mm upside-down telescopic fork 16-way
Suspension, rear	New Uni-Trak Compression damping: 16-way Rebound damping: 16-way Spring preload: Fully adjustable
Wheel travel, front	255 mm
Wheel travel, rear	230 mm
Tyre, front	3.00-21 51P
Tyre, rear	4.60-18 63P
Brakes, front	Single 250 mm disc Dual-piston
Brakes, rear	Single 240 mm disc Single-piston
Steering angle, left / right	45° / 45°
Dimensions (L x W x H)	2,200 mm x 820 mm x 1,205 mm
Wheelbase	1,430 mm
Ground Clearance	285 mm
Seat height	890 mm
Fuel capacity	7.7 litres
Curb Mass	138 kg
Automatic Headlights On (AHO)	n/a
Complies to EU emission limit	-

* Prices are recommended and inclusive of VAT @ 15% and on the road charges.